



## Message In A Speaker PLUS Looping



**1 Audio Looping**  
The indoor audio player will play your track on a constant loop/repeat.

**2 Status LED**  
The LED indicates the players state.

**3 Wall Mount**  
Easily mount the player onto a suitable surface via the U-Shaped rear wall mount.

**4 Great Audio Quality**  
Audio is output via a class D 15W amplifier providing great sound quality.

**5 Power On/Off**  
Turn the device on/off via the 12V power supply.

**6 Micro SD Card Slot**  
Store your content with a Micro SD Card (128MB supplied).

**7 Volume Button**  
Adjust the players volume with the built-in control.

**✓ Colour**  
Choose between black or white.

# Technical Information

## Play Modes - Using your Micro SD Card

In order for the device to read your track, you must name it to 01.mp3

### Looping Mode

Looping Mode will repeatedly play 1 track, without being triggered by the motion sensor.

If you have multiple audio files, stitch them together into one track beforehand.

Please follow the steps below:

1. Place your track onto the Micro SD Card named 01.mp3
2. A read (numbered 6) file needs to be placed within the Micro SD Card. Please download this file on the 'downloads' section of the product page.
3. Upon receiving the file, all you need to do is drag onto your card.

### How to revert your Message In A Speaker PLUS - Looping Mode to Sequential / Random Mode

1. Open the rear of the player by undoing the 4 screws.
2. Disconnect the wire link.
3. Connect the PIR wire.
4. Refer to the Message In A Speaker PLUS - Standard spec sheet for uploading content in Sequential / Random Mode;  
<https://www.interpretationshop.co.uk/product/message-in-a-speaker-plus/#tab-downloads>

<b>Unit Weight</b>	MIAS+: 1.16Kg, Bracket: 0.14kg
<b>Unit Dimensions</b>	172mm x 150mm x 217mm
<b>Power Supply</b>	DC12V
<b>Message Storage Medium</b>	Micro SD Card - Max. 32GB (Supplied 128MB)
<b>Message Encoding Format</b>	.MP3, .WAV
<b>Audio Bitrate</b>	128Kbps
<b>Frequency Response</b>	85Hz - 20kHz
<b>Operating Voltage</b>	9-24V DC
<b>Operating Current</b>	≤2000mA
<b>Standby Current</b>	≤30mA
<b>Consumption Current at Playback</b>	≤500mA (12V DC)
<b>PIR Range</b>	≤6m in 120° angle
<b>Included</b>	1 x MIAS+, 1 x U-Shaped Mount, 1 x Power Adapter, 1 x Micro SD Card, Fixing Screws

**NOTE:** Use a PC or Laptop running Windows OS. MAC OS is not supported due to hidden files generated by the OS.

## U-Shaped Mount



### How to install;

Screw the U-Shape into a wall surface and slot in the MIAS+. Lock into place using the supplied screws.


## Related Products




Small PIR Sensor



SoundClip V2

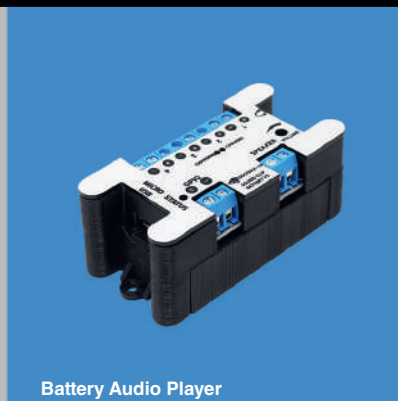

Battery Audio Player

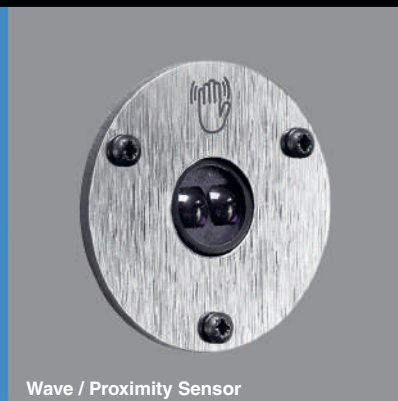

Wave / Proximity Sensor