



Message In A Speaker PLUS Looping



1 Audio Looping
The indoor audio player will play your track on a constant loop/repeat.

2 Status LED
The LED indicates the players state.

3 Wall Mount
Easily mount the player onto a suitable surface via the U-Shaped rear wall mount.

4 Great Audio Quality
Audio is output via a class D 15W amplifier providing great sound quality.

5 Power On/Off
Turn the device on/off via the 12V power supply.

6 Micro SD Card Slot
Store your content with a Micro SD Card (128MB supplied).

7 Volume Button
Adjust the players volume with the built-in control.

✓ Colour
Choose between black or white.

Technical Information

Play Modes - Using your Micro SD Card

In order for the device to read your track, you must name it to 01.mp3

Looping Mode

Looping Mode will repeatedly play 1 track, without being triggered by the motion sensor.

If you have multiple audio files, stitch them together into one track beforehand.

Please follow the steps below:

1. Place your track onto the Micro SD Card named 01.mp3
2. A read (numbered 6) file needs to be placed within the Micro SD Card. Please download this file on the 'downloads' section of the product page.
3. Upon receiving the file, all you need to do is drag onto your card.

How to revert your Message In A Speaker PLUS - Looping Mode to Sequential / Random Mode

1. Open the rear of the player by undoing the 4 screws.
2. Disconnect the wire link.
3. Connect the PIR wire.
4. Refer to the Message In A Speaker PLUS - Standard spec sheet for uploading content in Sequential / Random Mode;
<https://www.interpretationshop.co.uk/product/message-in-a-speaker-plus/#tab-downloads>

Unit Weight	MIAS+: 1.16Kg, Bracket: 0.14kg
Unit Dimensions	172mm x 150mm x 217mm
Power Supply	DC12V
Message Storage Medium	Micro SD Card - Max. 32GB (Supplied 128MB)
Message Encoding Format	.MP3, .WAV
Audio Bitrate	128Kbps
Operating Voltage	9-24V DC
Operating Current	≤2000mA
Standby Current	≤30mA
Consumption Current at Playback	≤500mA (12V DC)
PIR Range	≤6m in 120° angle
Included	1 x MIAS+, 1 x U-Shaped Mount, 1 x Power Adapter, 1 x Micro SD Card, Fixing Screws

NOTE: Use a PC or Laptop running Windows OS. MAC OS is not supported due to hidden files generated by the OS.

U-Shaped Mount



How to install;

Screw the U-Shape into a wall surface and slot in the MIAS+. Lock into place using the supplied screws.


Related Products




Small PIR Sensor



SoundClip V2

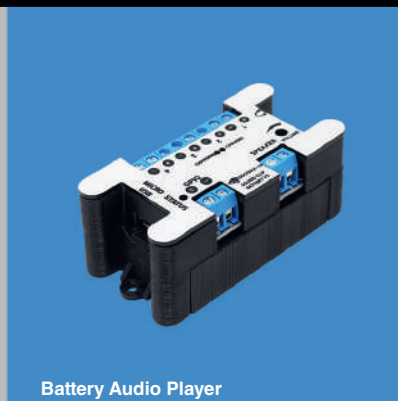

Battery Audio Player

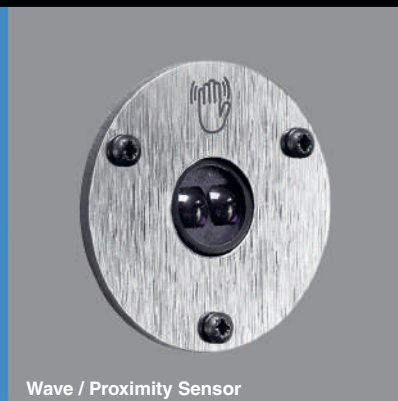

Wave / Proximity Sensor